
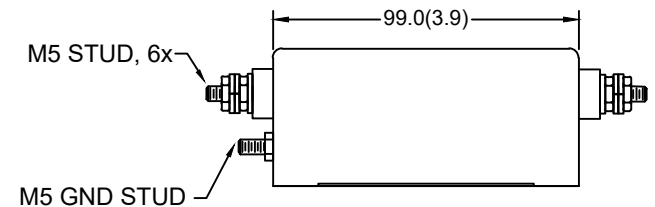


PF303S-10-100


3PH DELTA COMMERCIAL/INDUSTRIAL FILTER  
SINGLE STAGE / CHASSIS MOUNT

SPECIFICATIONS

- MAX VOLTAGE: 0-520VAC
- MAX CURRENT: 10A/LINE
- USABLE FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 50C
- LEAKAGE CURRENT (250V/60HZ): <1mA
- TYP. WEIGHT, LB(KG): 2.7(1.3)
- CLIMATIC CLASS: 25/100/21
- DESIGNED AND MANUFACTURED IN ACCORDANCE WITH THE FOLLOWING STANDARDS:
  - EN60939-3
  - CSA22.2 NO. 8
  - LV DIRECTIVE

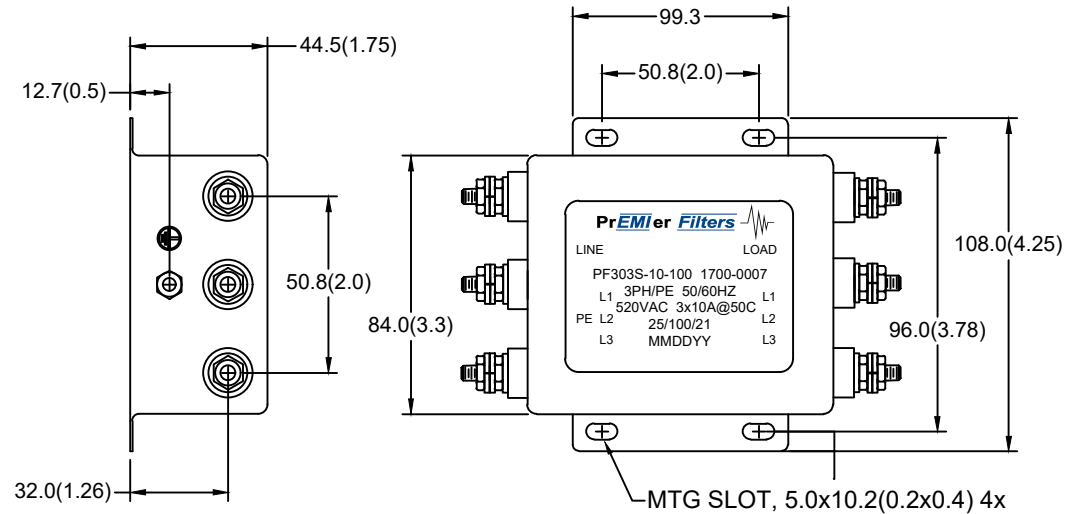

SCHEMATIC

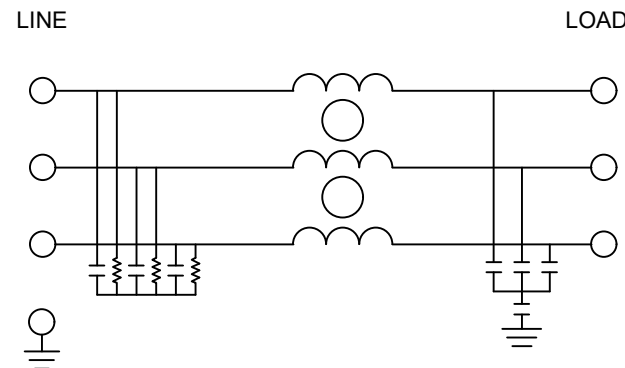

| TYPICAL INSERTION LOSS, 50/50 OHM |      |      |    |     |     |
|-----------------------------------|------|------|----|-----|-----|
| FREQ(HZ)                          | 150K | 500K | 1M | 10M | 30M |
| CM, dB                            | 70   | 74   | 70 | 60  | 52  |
| DM, dB                            | 64   | 66   | 70 | 62  | 60  |