




PF305S-50-100


3PH DELTA COMMERCIAL/INDUSTRIAL FILTER  
SINGLE STAGE / CHASSIS MOUNT

**SPECIFICATIONS**

- MAX VOLTAGE: 0-520VAC
- MAX CURRENT: 50A/LINE
- USABLE FREQUENCY: 50/60/400HZ
- OPERATING TEMP.: -40 TO 50C
- LEAKAGE CURRENT (250V/60HZ): <1mA
- TYP. WEIGHT, LB(KG): 3.2(1.5)
- CLIMATIC CLASS: 25/100/21
- DESIGNED AND MANUFACTURED IN ACCORDANCE WITH THE FOLLOWING STANDARDS:
  - EN60939-3
  - CSA22.2 NO. 8
  - LV DIRECTIVE

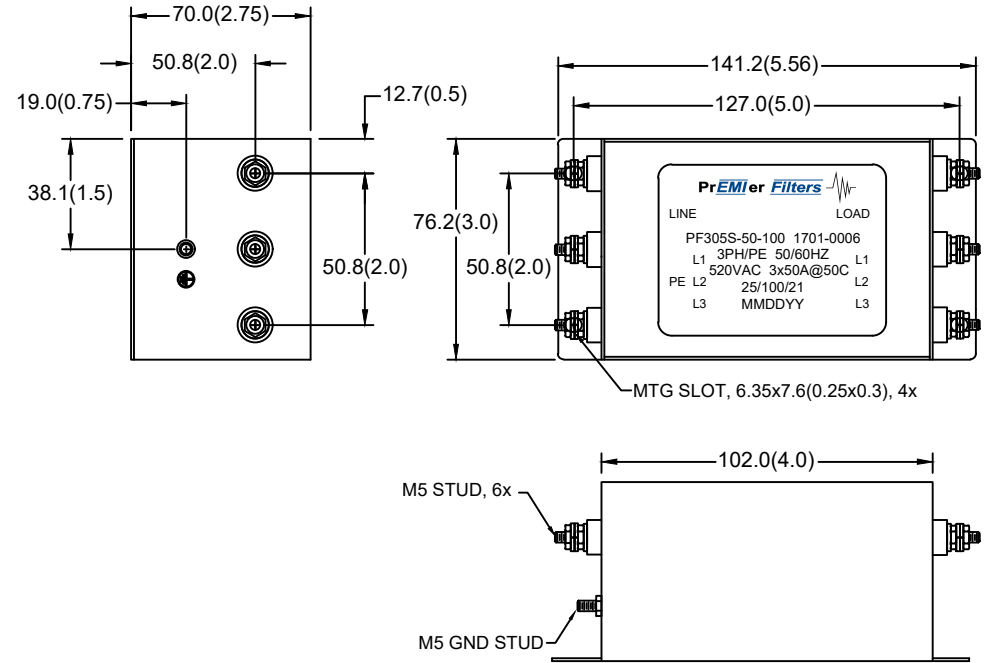

**SCHEMATIC**

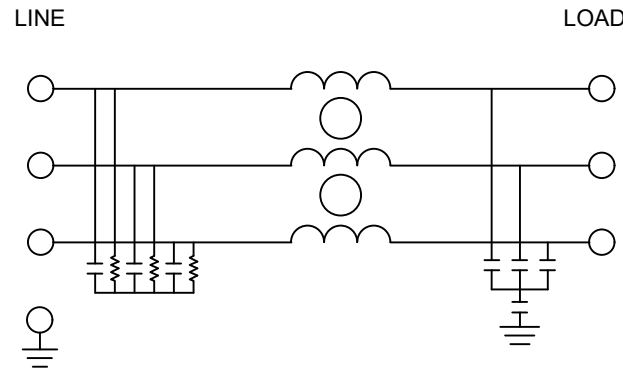

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	150K	500K	1M	10M	30M
CM, dB	48	56	60	54	42
DM, dB	42	62	74	70	62

SPECIFICATIONS SUBJECT TO CHANGE