


PF400S-40-100


3PH WYE COMMERCIAL/INDUSTRIAL FILTER  
SINGLE STAGE / CHASSIS MOUNT

## SPECIFICATIONS

MAX VOLTAGE: 0-520VAC  
 MAX CURRENT: 40A/LINE  
 USABLE FREQUENCY: 50/60/400HZ  
 OPERATING TEMP.: -40 TO 50C  
 LEAKAGE CURRENT (250V/60HZ): <1mA  
 TYP. WEIGHT, LB(KG): 2.7(1.3)  
 CLIMATIC CLASS: 25/100/21  
 DESIGNED AND MANUFACTURED IN ACCORDANCE  
 WITH THE FOLLOWING STANDARDS:  
 EN60939-3  
 CSA22.2 NO. 8  
 LV DIRECTIVE

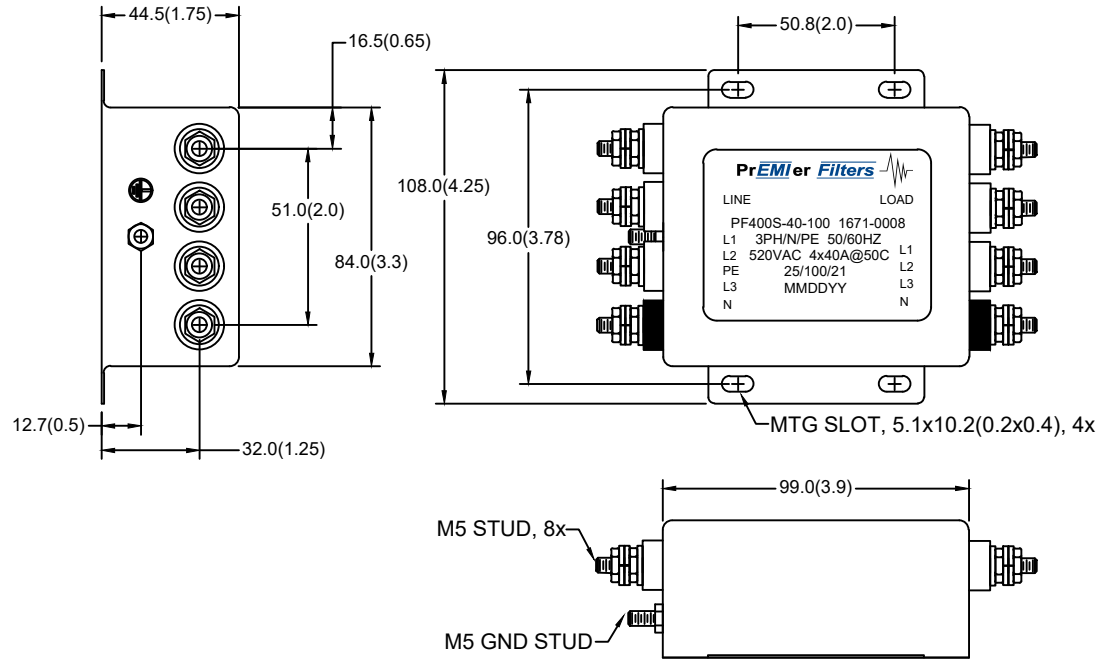

## SCHEMATIC

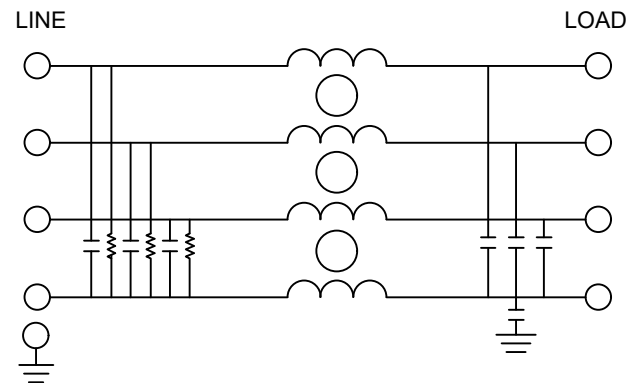

TYPICAL INSERTION LOSS, 50/50 OHM					
FREQ(HZ)	150K	500K	1M	10M	30M
CM,dB	68	72	75	60	52
DM, dB	54	72	75	75	60